

Absolute maximum rating

| Parameters | Symbol | Min. | Max. | Unit |
|------------|--------|------|------|------|
| | | | | ° |
| | | | | ° |
| | | | | |
| | | | | |

Recommended operating environment

| Parameter | Symbol | Min. | Typical | Max | Unit |
|-----------|--------|------|---------|-----|------|
| | | | | | ° |

Low Speed Characteristics

| Parameter | Symbol | Min. | Typical | Max | Unit |
|-----------|--------|------|---------|-----|------|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |



F-tone Networks

北亿纤通科技有限公司

F-TONE GROUP 集团旗下

Optical characteristics





| Parameter | Symbol | Min. | Typical | Max | Unit | Notes |
|--------------------|--------|------|---------|-----|------|-------|
| Transmitter | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Receiver | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

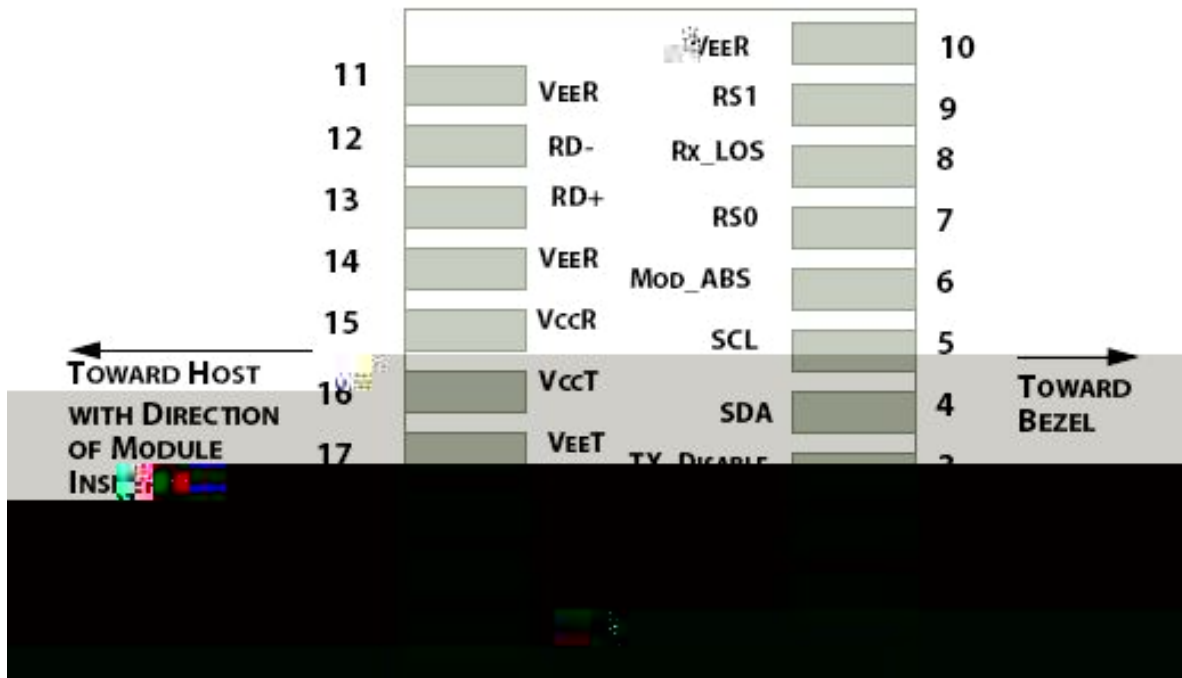


Figure 1: Interface to Host PCB



Figure 2: Module Contact Assignment

Pin definition



F-tone Networks

北亿纤通科技有限公司

F-TONE GROUP 集团旗下

北亿纤通科技有限公司

F-TONE



Figure5. Mechanical Specifications

Regulatory Compliance

| Feature | Agency | Standard |
|---------|--------|----------|
| | | |
| | | |
| | | |



Ordering information

| Part Number | Product Description |
|-------------|---------------------|
| | |
| | |

References

Important Notice